

# HT-17000-S Series

HT-17000-S-M Monochrome

HT-17000-S-C Color



## 16.8MP 10GigE camera with Sony IMX387 CMOS sensor

HT-17000-S features the Sony IMX387 CMOS sensor. At full resolution (5456 x 3076), you get up to 61 frames per second. With its 10GBaseT interface, sleek smaller case and CAT6A connection, this camera has the familiarity of GigE but with 10x the speed. Using CAT6A cabling, you can get cable lengths from 1 meter up to 100 meters. The HT-17000-S offers multi-camera synchronization at <math><1\mu s</math>, low CPU overhead, and excellent price-performance ratio.

### Benefits

- » High-speed RJ45 10GBaseT interface
- » 10x the speed of GigE
- » GigE Vision® and Genicam™ compliant

### Applications


- » Virtual reality
- » Goal Line technology
- » 4D reconstruction
- » Volumetric capture
- » Motion capture
- » Immersive 3D Content
- » Finish Line Vision
- » Referee Assist

## Specifications

Sensor	Sony IMX387
Resolution	5456 x 3076
Megapixels	16.8 MP
Sensor Type	Four Thirds (16:9)- CMOS
Max Frame Rate	61 fps @ 8-bit 40 fps @ 12-bit
Cell Size	3.45µm square
Standard Mount	52mm, M52x1.5x12mm BFL, F-mount Available
Shutter	Global
Bit Depth	8 & 12 Bit
GPIO / Triggering	3 in, 3 out Software, External (Pulse or Edge)
Interface	RJ45 10GBaseT
Exposure/Integration*	35µs- 1s
Dynamic Range	71 dB
Monochrome Modes	Mono8, Mono12, Mono12Packed
Color Modes	RGB8, BGR8, YUV411, YUV422, YUV444
Raw Modes	BayerRG8, BayerRG12, BayerRG12Packed
Operating System	Win10 (64 bit), Linux (64 bit)
Compliance	CE, FCC, RoHS, WEEE, GigE Vision, GenICam
Power Requirements	8W, 12V
Operating Temperature	0C- 45C
Storage Temperature	-30C to +60C
Dimensions & Weight	88 x 58 x 60- 405g
Warranty	2 Years

\*all minimum exposure specs can vary from what is listed based on the limitations of each sensor as per notice from the manufacturer.

## Mechanical drawings

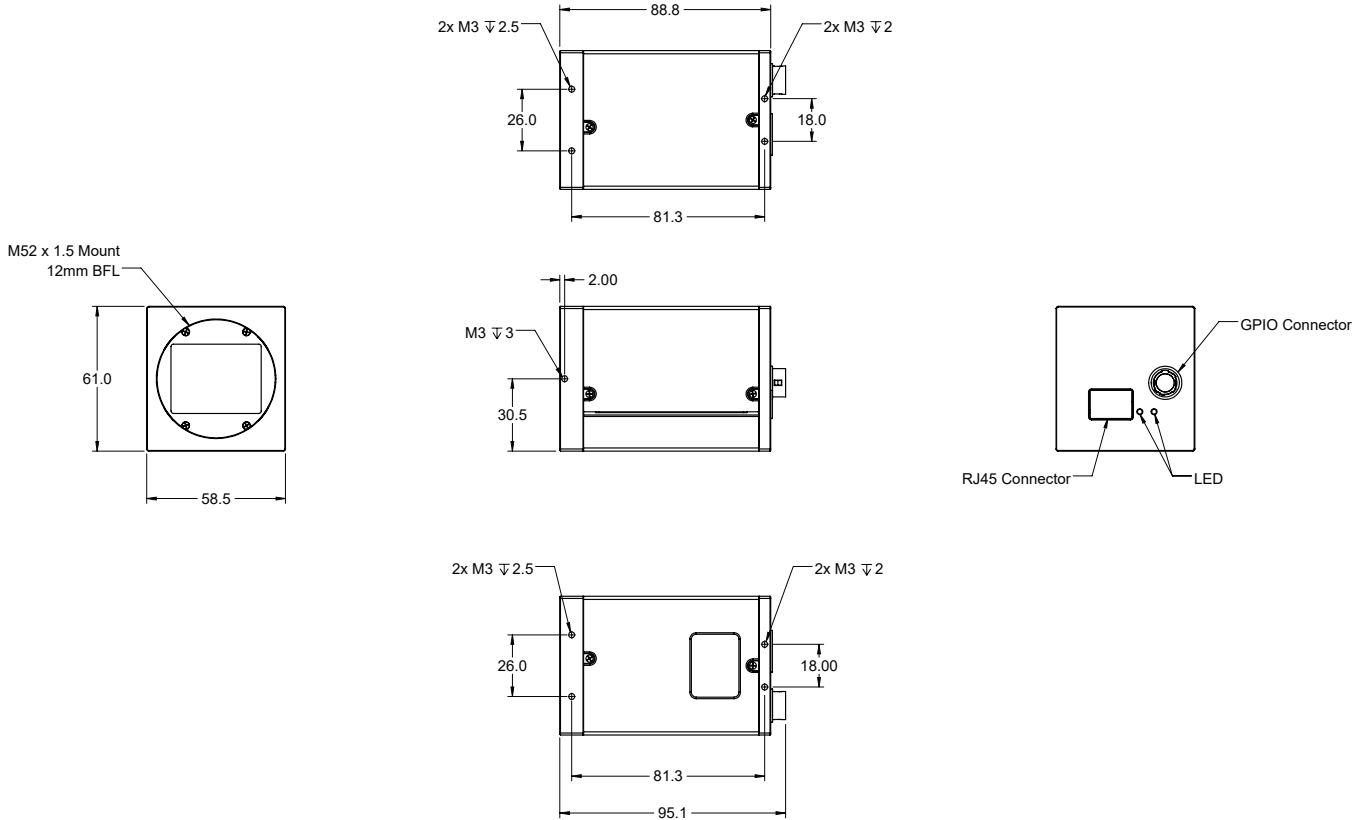

## Spectral Sensitivity

