



AcC 36DX900-I67 Technical Reference Manual



1. Quick Facts	3
2. Electrical Characteristics	5
2.1 Absolute Maximum Ratings	5
2.2 Recommended Operating Conditions	5
3. Dimensional Diagrams	6
3.1 AcC 36DX900-I67 without Tripod Adapter	6
3.2 AcC 36DX900-I67 with Tripod Adapter	7
4. Spectral Characteristics	8
4.1 Spectral Sensitivity - IMX900-AQR-C	8
5. I2C Devices	9
6. Software Support	10
6.1 Further Assistance	10
7. Trigger Control FPGA	11

1 Quick Facts

General	
Dynamic Range	12 bit
Resolution	2048x1536
Frame Rate at Full Resolution	80 *
Pixel Formats	10-Bit Bayer (RG)

*) Assuming the deserializer is connected to the host with 4 data lanes at 2500 Mbps each.

Optical Interface	
Sensor Type	Sony IMX900-AQR-C
Shutter Type	Global
Sensor Format	1/3.1 inch
Pixel Size	2.25 μm

Electrical Interface	
Interface	GMSSL2 via FAKRA connector
Supply voltage	10-27V
Current consumption	approx 95 mA @ 12 VDC

Mechanical Data	
Dimensions	H: 36 mm, W: 36 mm, L: 60.3 mm
Mass	80 g
Protection Class	IP6K6, IP6K7 (ISO 20653) *

*) Protection only while The Imaging Source IP67 FAKRA cable is connected to the camera.

Adjustments	
Shutter	15 μs to 1 s
Gain	0 dB to 48 dB



Environmental	
Temperature (operating)	-5 °C to 45 °C
Temperature (storage)	-20 °C to 60 °C
Humidity (operating)	20 % to 80 % (non-condensing)
Humidity (storage)	20 % to 95 % (non-condensing)



2 Electrical Characteristics

2.1 Absolute Maximum Ratings


Item	Symbol	Pins	Min	Max	Unit
Supply voltage	V_COAX		-0.3	+27.0	V

2.2 Recommended Operating Conditions




Item	Symbol	Pins	Min	Typ	Max	Unit
Supply voltage	V_COAX		10.0	12.0	24.0	V

3 Dimensional Diagrams

3.1 AcC 36DX900-I67 without Tripod Adapter

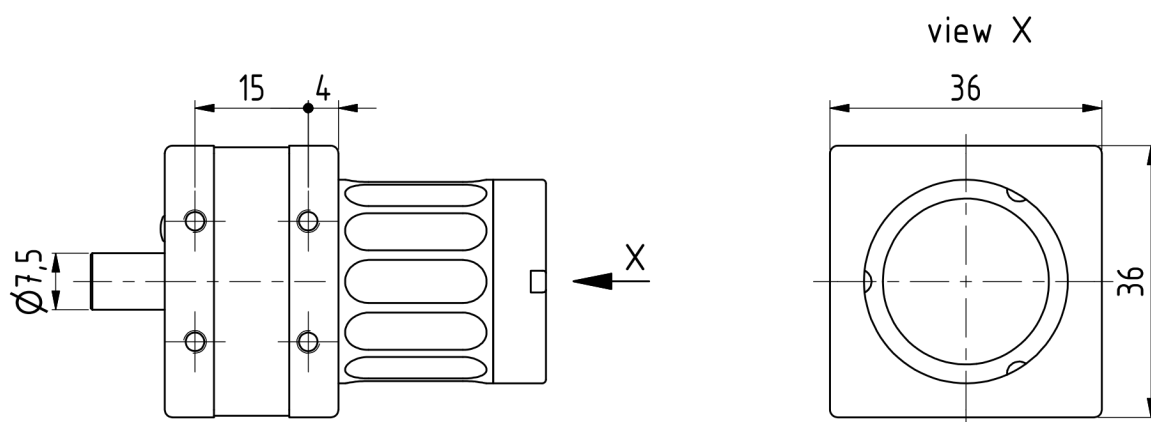


*) available in different lengths

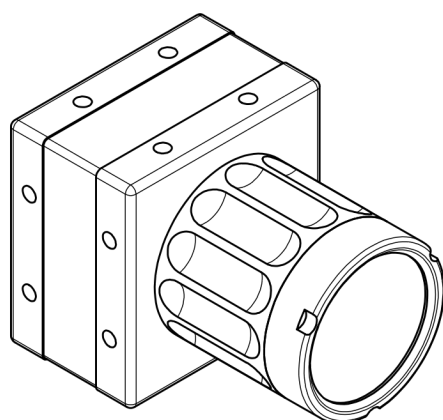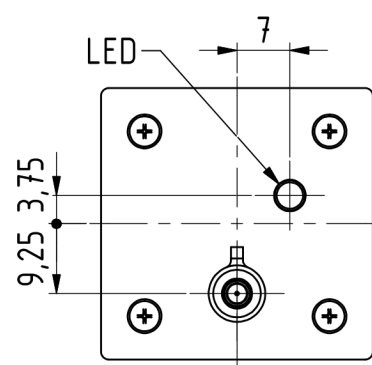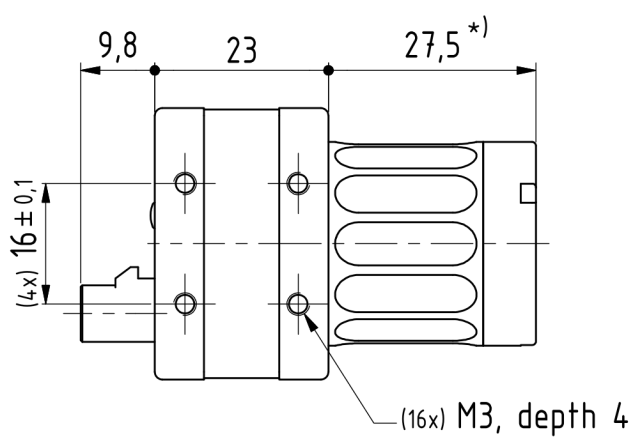



Scale: 1 : 1
 Dimensions: mm
 Tolerances: DIN ISO 2768-m
 275-20-1-01-00-c (w/o tripod-adapter)



3.2 AcC 36DX900-I67 with Tripod Adapter

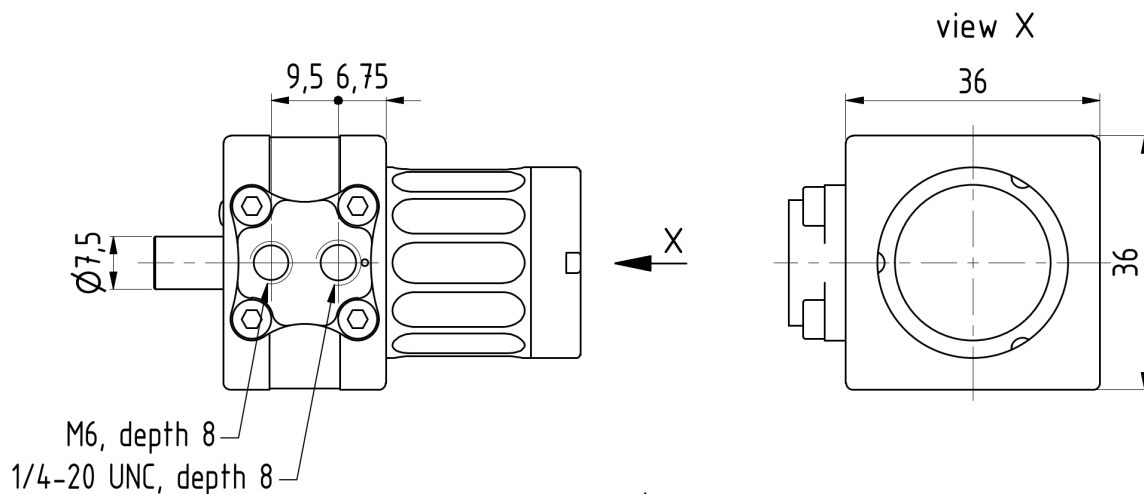

*) available in different lengths

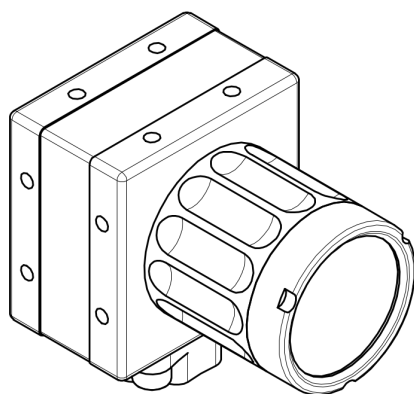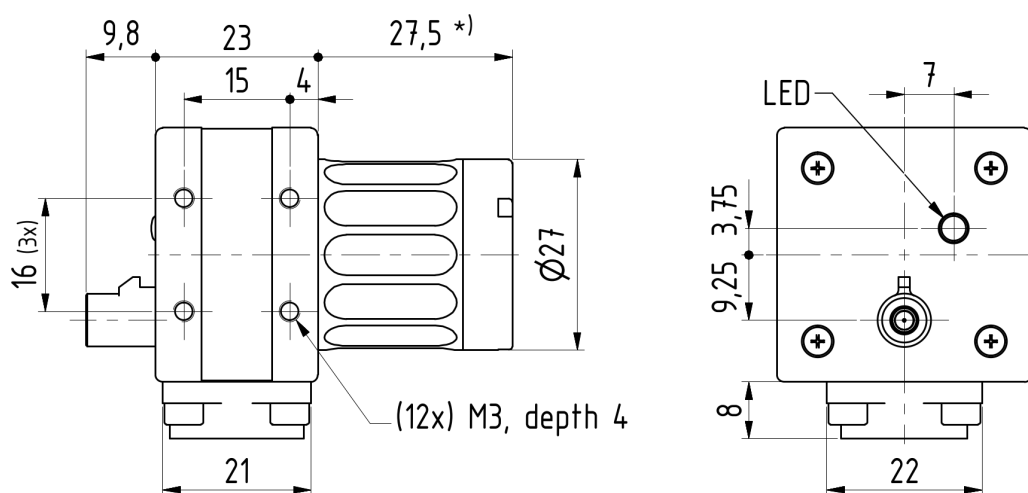


Scale: 1:1
 Dimensions: mm
 Tolerances: DIN ISO 2768-f
 275-20-1-01-00-c



4 Spectral Characteristics

4.1 Spectral Sensitivity - IMX900-AQR-C

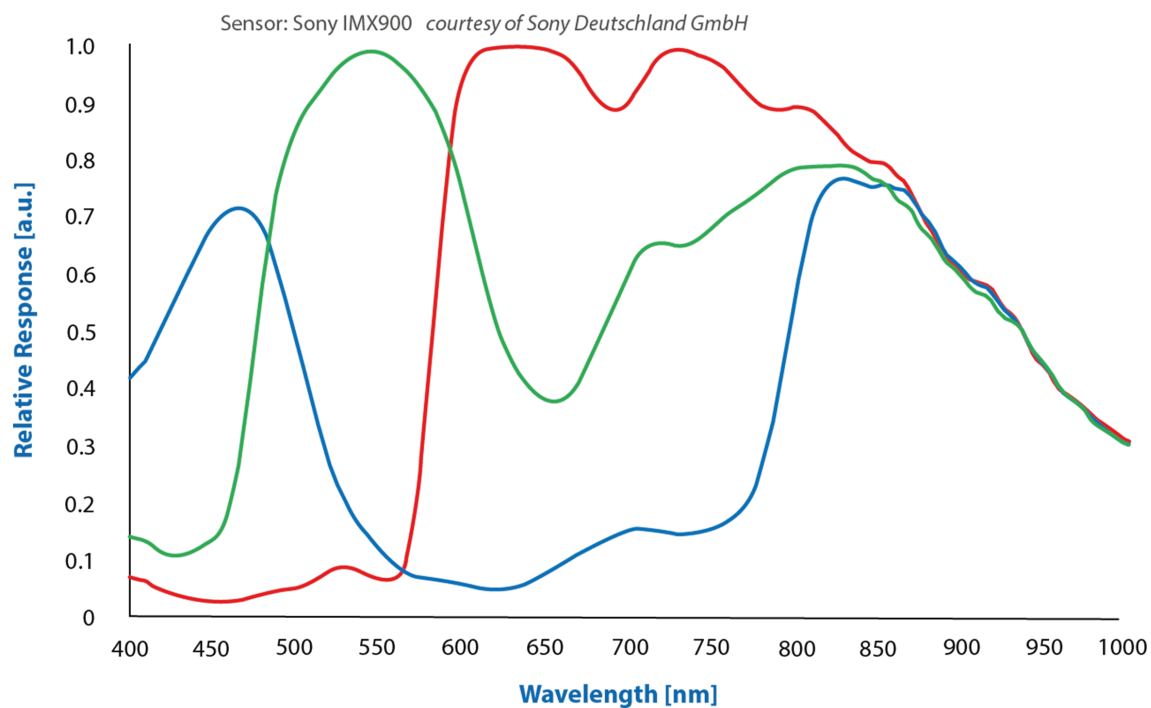



5 I2C Devices

There are multiple I2C devices on the AcC 36DX900-I67 sensor board. The following table describes the parts and their I2C addresses:

Address (7-bit)	Device	Description
0x1A	IMX900-AQR-C	Image Sensor
0x40	MAX9295A	GMSL2 Serializer
0x40	LCMXO3L-1300E	Trigger Control FPGA (configuration)
0x42	LCMXO3L-1300E	Trigger Control FPGA (control)
0x44	LCMXO3L-1300E	I2C Mapping and Sensor Control FPGA
0x50	AT24C256C	EEPROM



6 Software Support

The Imaging Source provides driver packages for camera access on supported platforms. The driver documentation for the JetPack driver can be found here: [theimagingsource-drivers Documentation](#).

6.1 Further Assistance

For more detailed information, register settings and using the camera on other platforms, please contact [The Imaging Source](#).



7 Trigger Control FPGA

In order to handle complex trigger/strobe functions of the image sensor, a FPGA is present the on sensor board.

A reference driver implementation is available upon request.



AcC 36DX900-I67

All product and company names in this document may be trademarks and tradenames of their respective owners and are hereby acknowledged.

The Imaging Source Europe GmbH cannot and does not take any responsibility or liability for any information contained in this document. The source code presented in this document is exclusively used for didactic purposes. The Imaging Source does not assume any kind of warranty expressed or implied, resulting from the use of the content of this document or the source code.

The Imaging Source Company reserves the right to make changes in specifications, function or design at any time and without prior notice.

Last update: October 2025

© 2025 The Imaging Source Europe GmbH

All rights reserved. Reprint, also in parts, only allowed with permission of The Imaging Source Europe GmbH.

All weights and dimensions are approximate. Unless otherwise specified, the lenses shown in the context of cameras are not shipped with these cameras.

Headquarters:

*The Imaging Source Europe GmbH
Überseetor 18, D-28217 Bremen, Germany
Phone: +49 421 33591-0*

North & South America:

*The Imaging Source, LLC
Suite 470, 4600 Park Road, Charlotte, NC 28209, United States
Phone: +1 877-462-4772*

Asia Pacific:

*The Imaging Source Asia Co., Ltd.
3F., No. 43-7/8, Zhongxing Road
Xizhi District, New Taipei City 221012, Taiwan
Phone: +886 2-2792-3153*

www.theimagingsource.com