


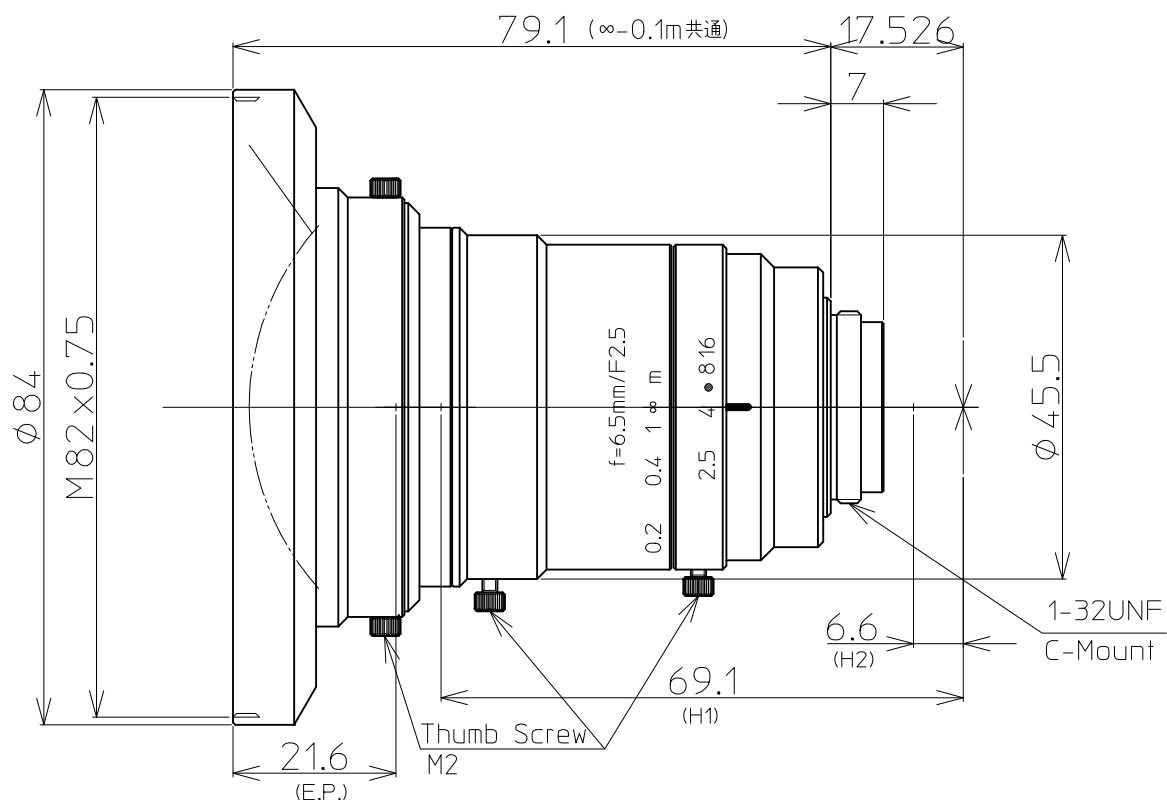

| 1.1" 2.5/6.5mm C                          |            | 1.1"            | 1"         | 2/3"            |
|-------------------------------------------|------------|-----------------|------------|-----------------|
| FOCAL LENGTH                              |            | f=6.5mm         |            |                 |
| F-NUMBER                                  |            | F=2.5-16        |            |                 |
| PICTURE SIZE                              |            | 10.6×14.1mm     | 9.6×12.8mm | 6.6×8.8mm       |
| ANGLE OF VIEW<br>(∞)                      | VER. ANGLE | 78.7°           | 73.0°      | 53.5°           |
|                                           | HOR. ANGLE | 95.7°           | 89.9°      | 68.1°           |
|                                           | DIA. ANGLE | 109.1°          | 103.4°     | 80.8°           |
| DISTORTION (TV)                           |            | -1.51%          | -1.27%     | -0.68%          |
| FIELD OF VIEW<br>(MINIMUM FOCUS DISTANCE) | VER.       | 190mm           | 172mm      | 117mm           |
|                                           | HOR.       | 256mm           | 231mm      | 157mm           |
|                                           | DIA.       | 323mm           | 292mm      | 197mm           |
| MINIMUM FOCUS DISTANCE                    |            | 0.1m            |            |                 |
| FLANGE BACK                               |            | 17.526mm in air |            |                 |
| BACK FOCUS                                |            | 10.9mm in air   |            |                 |
| FILTER SCREW SIZE                         |            | M82×0.75        |            |                 |
| FRONT/REAR EFFECTIVE DIA.                 |            | FRONT φ46.0mm   |            | REAR φ18.5mm    |
| MOUNT                                     |            | C-MOUNT         |            |                 |
| EXIT PUPIL                                |            | -61.7mm         |            |                 |
| TEMPERATURE RANGE                         |            | -10~+50°C       |            |                 |
| STORAGE TEMPERATURE RANGE                 |            | -20~+60°C       |            |                 |
| RESOLUTION CENTER/CORNER                  |            | CENTER 200lp/mm |            | CORNER 100lp/mm |
| WEIGHT                                    |            | 300g            |            |                 |

NOTE: Specifications and availability are subject to change without notice

注) 本仕様については、予告なしに変更する場合があります。

|            |            |             |                   |          |       |
|------------|------------|-------------|-------------------|----------|-------|
|            |            | 尺<br>度      | 1/1               | 工場<br>番号 | LM6FC |
|            |            | 機<br>種<br>名 | 1.1" F2.5 f=6.5mm |          |       |
| 2018.11.15 | フィルター枠形状変更 | 機<br>種<br>番 | LM6FC24M 外観図      |          |       |
| 2018.04.05 | 作成年月日      |             |                   |          |       |