

VL3522U-MPZ

f=35mm F2.2

for 1 Type cameras, Fixed-focal

USB interface, C-Mount

Optical Specifications


Model No.	VL3522U-MPZ		Effective Lens Aperture	Front:φ21.5mm Rear:φ15.6mm			
Focal Length	35mm		Back Focal Length	9.7mm (in Air)			
Operation Range	Iris	F2.2 - F16.0		Flange Back Length			
	Focus	0.2m - Inf.		Max. Image Format			
Object Dimension at M.O.D.	1 Type	69.7mm x 52.2mm		Distortion	1 Type	0.0%	
	2/3 Type	47.9mm x 35.9mm			2/3 Type	0.0%	
	1/1.8 Type	39.1mm x 29.3mm			1/1.8 Type	0.0%	
Angle of View	D	1 Type	25.8°	2/3 Type	17.9°	1/1.8 Type	14.7°
	H		20.8°		14.4°		11.8°
	V		15.7°		10.8°		8.9°

Mechanical & Electrical Specifications

Control Interface	USB2.0		Dimensions	As per the attached drawing	
Power mode	Bus powerd (500mA)		Mount	C-Mount	
Connector	USB TypeA		Weight	313g	
Operating Temperature	-10°C - +50°C		Tripod Screw	-	
Control	Iris	Motorized	Filter thread	M43 x P0.75mm	
	Focus	Motorized			

Dimensions

Unit:mm

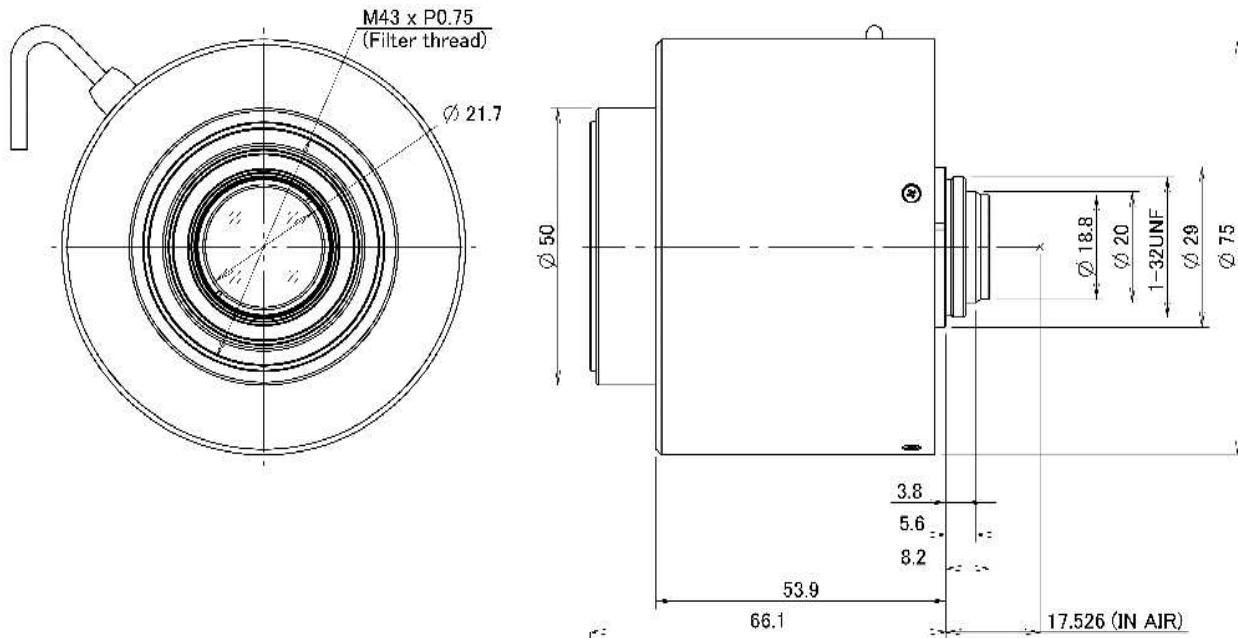

Length of Wire

300±20 (mm)

This specification is subject to change without any notice.

2021.06