

TLR-9KG5 Line Scan

TLR-9KG5-M Monochrome
TLR-9KG5-C Color



TLR-9KG5: 10GigE line-scan camera with Gpixel GLT5009BSI

PACE TLR-9KG5 features the Gpixel GLT5009BSI CMOS sensor. TLR-9KG5 comes with a resolution of 9K 256 TDI pixels and a line rate of: Single Line - 121KHz, Trilinear - 40KHz. This enables high-speed and low-noise image capture at 9K vision, ensuring all your inspection, sorting and production control requirements are met. Its 10GigE SFP+ interface allows cable lengths from 1M up to 10KM without the need for costly fiber converters/repeaters.

Benefits

- » High-speed 10GigE via SFP+
- » 10x the speed of GigE
- » GigE Vision® and GenICam™ compliant

Applications


- » Industrial Inspection
- » Printing Inspection
- » Label Inspection
- » Film Inspection
- » PCB Inspection
- » Automotive Inspection
- » Food Sorting and Grading
- » Pharmaceutical Inspection

Specifications


Sensor	GLT5009BSI
Resolution	9K 256 TDI
Line Scan Mode	Single line - 121KHz Trilinear - 40KHz
Sensor Scanning Width	45.36mm
Cell Size	5x5µm
Standard Mount	M52
Shutter	Global
Bit Depth	8 & 10 bit
GPIO / Triggering	2 in, 1 out, Encoder A/B in
Interface	10GigE SFP+
Exposure/Integration*	1µs-1s
Dynamic Range	66dB
Monochrome Modes	Mono8, Mono10, Mono10Packed
Color Modes	RGB
Corrections	Flat shading (dark, lit), Spatial
Operating System	Win 7, 8, 10, Linux (64bit)
Compliance	CE, FCC, RoHS, WEEE, GigE Vision, GenICam
Power Requirements	8W
Operating Temperature	0C - 45C
Storage Temperature	-30C to +60C
Dimensions & Weight	97 x 58 x 60 - 395g
Warranty	2 Years

*all minimum exposure specs can vary from what is listed based on the limitations of each sensor as per notice from the manufacturer.

Mechanical drawings

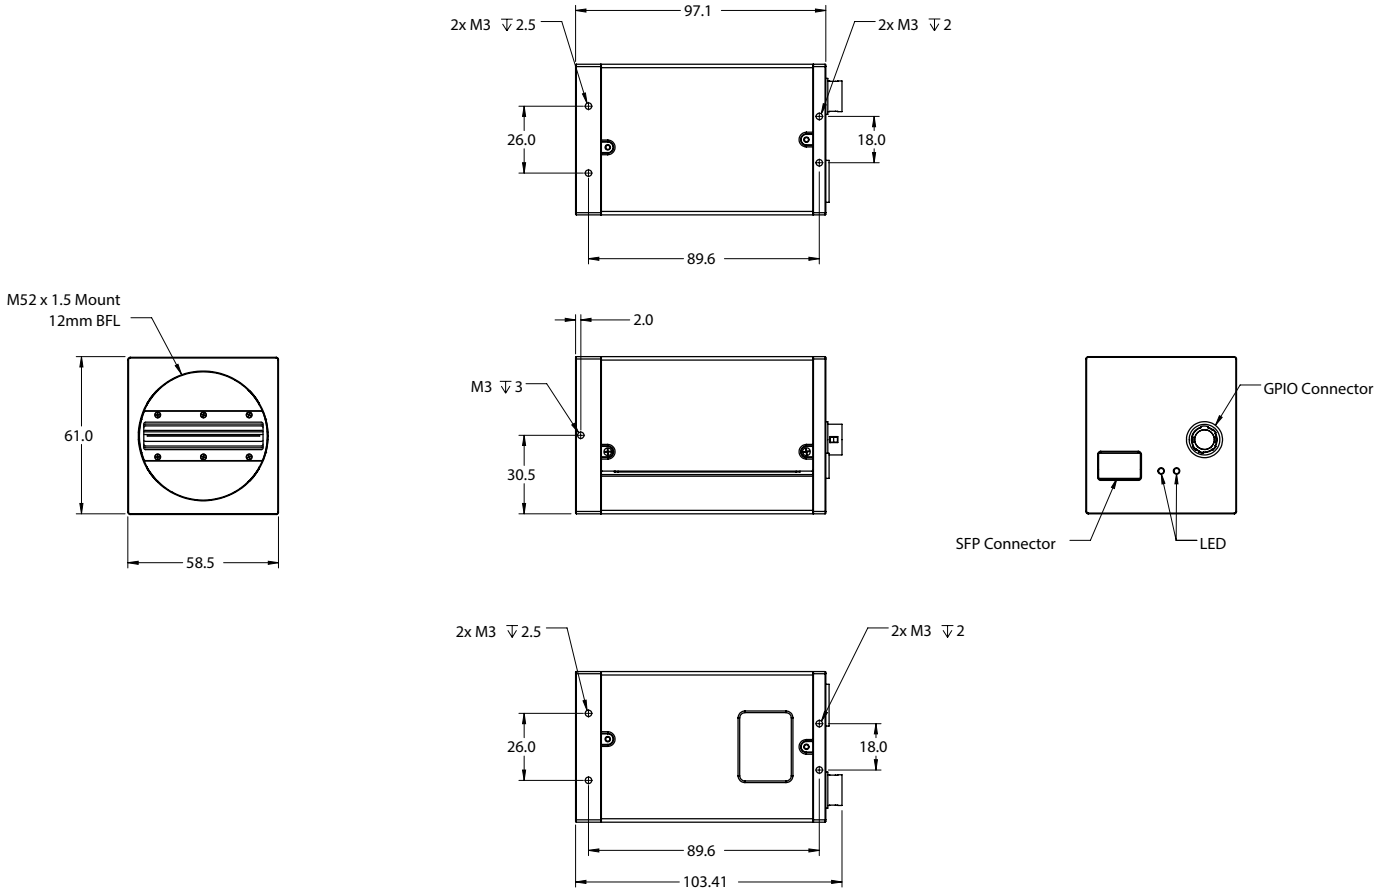

Spectral Sensitivity

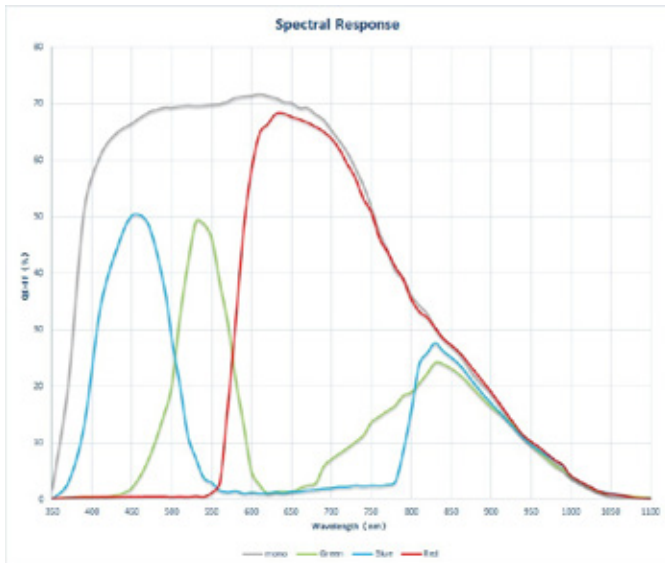

Any Questions?

1-866-780-6082

sales@emergentvisiontec.com

<https://emergentvisiontec.com>